


# VIBRATING FORK LEVEL SWITCH FOR LIQUIDS




IPS-LS-05




## OPERATING PRINCIPLE




Electronics of LFV excites the piezo-electric-crystals inside the tuning fork, which makes the fork tines vibrate at their natural resonance frequency in free air.



When fork tines are immersed in liquid, the frequency of fork vibration falls due to the density of liquid.



This change in frequency is detected by electronic circuit of LFV.



Presence of liquid is thus detected.

## PRODUCT OVERVIEW

IP SPL vibrating fork point level switch model IPSLS-05 is suitable for free-flowing liquids use in all process industries like food and beverages, chemical, pharma, oil & gas, water treatment plant and many more. Trumen vibrating fork gives reliable measurement values and is not affected by flow, vibrations, change in the media properties and material build-up.


## APPLICATIONS

Vibrating fork liquid level switch is used in different applications like

- Water
- Milk
- Diesel
- Edible Oil
- Paints
- WFI water
- Beverages
- Hydraulic oil
- Liquid LPG
- Honey
- Chemical

Flow/no-flow detection in pipelines

## ACID SAFE COATINGS



PTFE  
PFA  
HALAR  
TEFZEL ... etc

## FEATURES

- Compact size
- Fast switching response 0.5 to 2 sec
- Low power consumption
- Calibration-less operation
- Durable Construction
- Immune to External Vibrations
- Suitable for side as well as top mounting
- Minimum and maximum failsafe field selectable
- External indication LED available
- NAMUR (L-H / H-L) as per IEC-60947-5-6
- Ingress protection : IP 67/68 (as per IS/IEC 60529:2001)
- Process temperature max 250°C
- Process pressure max.20 bar
- 1/2" threaded mountings available
- Threaded / flanged / customized process connections
- Remote electronics with standard 10 meters cable length

## Performance specifications


Parameters	Descriptions
<b>General</b>	
Max. Viscosity	10,000 cStokes (= $cPose/(g/cm^3)$ ), (Higher viscosity available on request)
Maximum measured error	Max. $\pm 1$ mm (at reference operating conditions)
Switching response	0.5 to 2 sec
Repeatability	0.1 mm
Hysteresis	Approx. 2 mm
Influence of medium temperature	Max +2 to -3 mm (-20 to +150 °C)
Influence of medium density	Max +5 to -4 mm (1.0 to 2.5 $g/cm^3$ )
Influence of medium pressure	Max 0 to -3 mm (-1 to 20 bar)
Sensor Cable	Remote electronics require special cable from fork to controller, 10 meter standard length (Longer length max. upto 15m)
<b>Process</b>	
Ambient Temperature	-20°C ... 70°C (-4°F ... 158 °F)
Process Temperature	-20°C ... 80°C (-4°F ... 176 °F)
Extended Process Temperature	-30°C ... 250°C (-22°F ... 482 °F), (extensions & heat sinks required)
Process Pressure	Absolute / max. 20 bar
<b>Physical Specifications</b>	
Wetted Parts	SS 316 or SS 316L, PTFE, PFA, TEFZEL, HALAR
Process Connections	NPT / BSP / Hygienic 1/2", 3/4", 1", 1-1/4", 1-1/2", 2" & Triclover 1-1/2", 2" and Flanged ANSI / JIS / DIN / ASA / custom
Extensions Tube & Material	SS 304, SS 316, SS 316L
Insertion Length	50mm to 3,000mm

## Approvals & Certifications

ISO Certification	ISO 9001:2015
CE certification	All product comply as per directives 2014/35/EU Low Voltage Directive & 2014/30/EU Electromagnetic Compatibility Directive
RoHS Certification	RoHS Compliance as per RoHS Directive (2011/65/EU); Certificate No. RoHS-TTPL-2021-0305
Ingress Protection	IP67/68 as per IS/IEC 60529:2001
Ex-proof (Ex d T6 IIC)	Flameproof as per IS/IEC 60079-1:2014, Ingress Protection (IP-67) as per IS/IEC 60529:2001 Suitable for Gas Group: IIC, Suitable for Zone 1 & 2 atmospheres and Dust hazardous area Zone 21 & 22
Ex-ia Approval	Intrinsically safe according to the requirement of IS/IEC 60079-0:2011, IS/IEC 60079-11:2006 & IS/IEC 60529: 2001
EMC Certification	EMC Certified as per Standard IEC 61000-4-3, IEC 61000-4-2, IEC 61000-4-6, IEC 61000-4-29, IEC 61000-4-4, IEC 61000-4-5, CISPR 11
Vibration Test Certificate	Vibration complied as per IEC 60068 part 2-6 sinusoidal, 10-55Hz, 0.15mm

Specifications are subject to change without prior notice


## Typical Installations

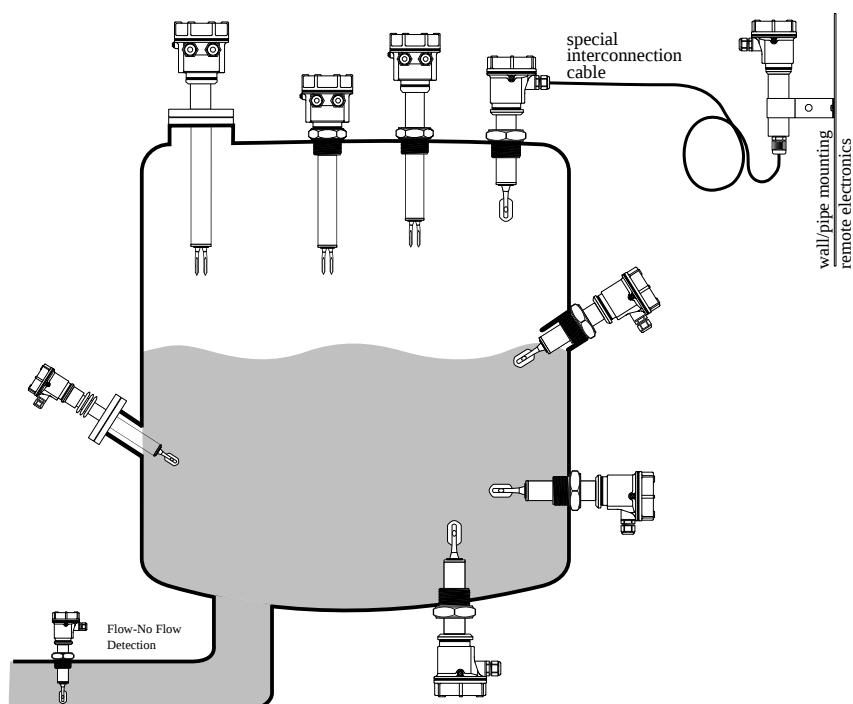

### Performance specifications

Parameter	Description	Electrical Connection
<b>Electrical</b>		
<b>EIUD / ERUD</b> Supply Output Relay Rating	Integral / Remote Electronics Universal Power Supply 15 to 80 VDC & 15 to 260 VAC 50/60Hz 1 DPDT potential free relay contact output 5 A each @ 24VDC or 220VAC	
<b>EIDP / ERDP</b> Supply Output Output Limit	Integral / Remote Electronics 12 to 60 VDC PNP Output 250mA max. Short Circuit Safe	
<b>EINL/EINH</b> Supply Output	NAMUR (L-H / H-L) as per IEC-60947-5-6 8.2 VDC ≤1.2mA & ≥2.1mA NAMUR output, 1KΩ series resistance	
<b>EIUSP / ERUSP</b> Supply Output Relay Rating DC Supply PNP Output	Integral / Remote Electronics Universal Power Supply 15 to 80 VDC & 15 to 260 VAC 50/60Hz Potential free SPDT relay contact output 5 A each @ 24VDC or 220VAC 15 to 60 VDC for PNP output 250mA max. Short Circuit Safe	
<b>EIAR</b> Supply Output Output Limit	Integral Electronics 18 to 260 VAC Two Wire AC series relay not less than 4mA to release external relay maximum 150mA to magnetize relay Use relays / contactors will more than 4mA holding current	
<b>EIDL</b> Supply Output Output Limit	Integral Electronics 4-20mA Loop Powered 15 to 60 VDC Two Wire 8 / 16mA & 4 / 20mA output 8mA (±1mA max) / 16mA (±1mA max) 4mA (±1mA max) / 20mA (±1mA max)	
<b>EIPFM</b> Supply Output Output Limit	Integral Electronics From PFM tester device < 30VDC PFM sourced powered output PFM 50Hz / 150Hz 200μS, 10mA	
<b>EIFS / ERFS</b>	Integral / Remote Electronics Specially designed with special output	Electrical connection depends on selected model code.

Ordering Information

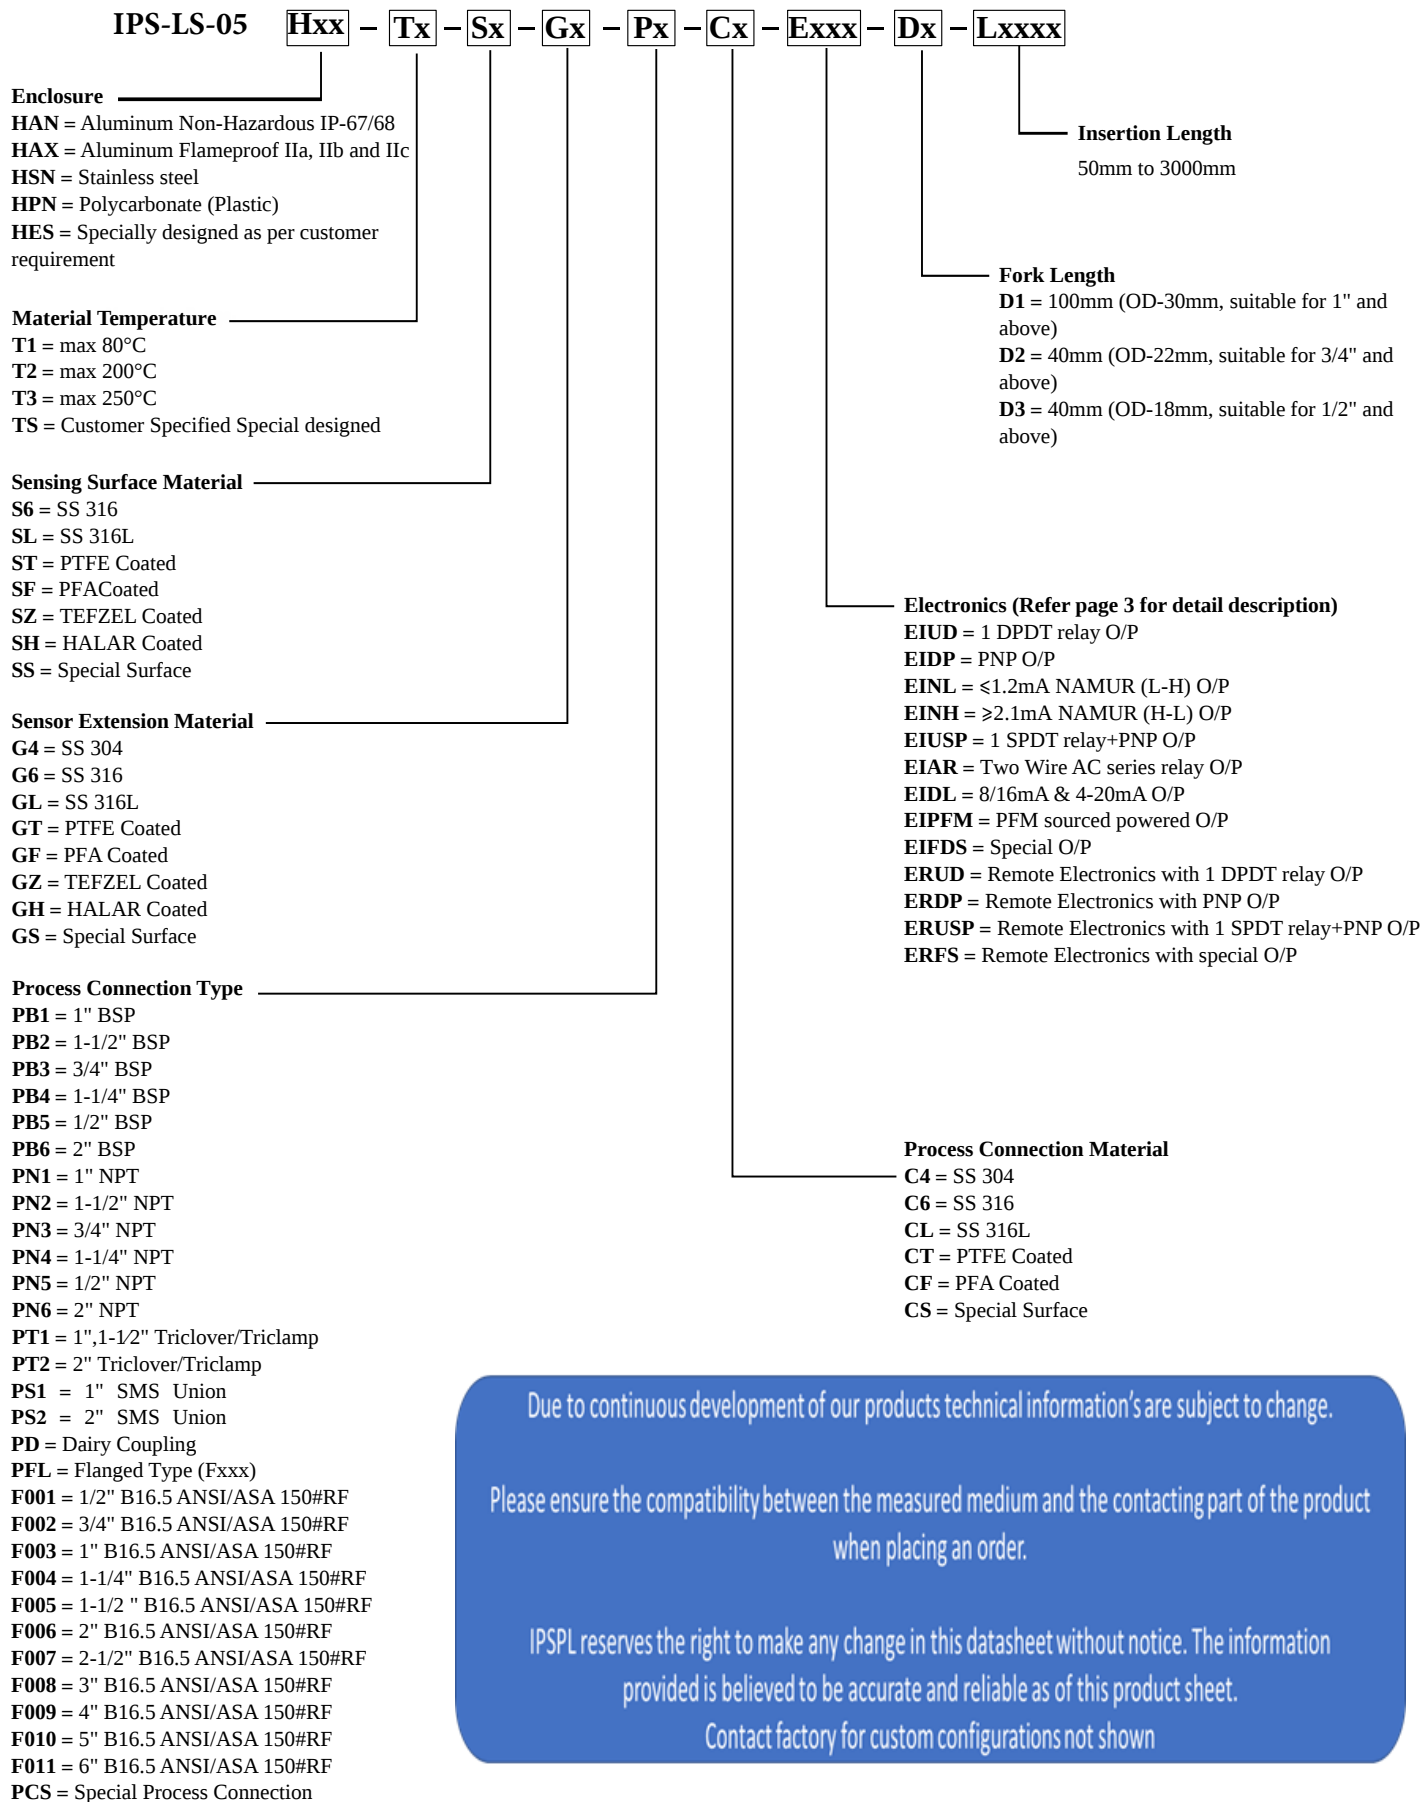

Due to continuous development of our products technical information's are subject to change.

Please ensure the compatibility between the measured medium and the contacting part of the product when placing an order.

IPSPL reserves the right to make any change in this datasheet without notice. The information provided is believed to be accurate and reliable as of this product sheet.

Contact factory for custom configurations not shown



Industrix Precise Solutions Private Limited

Room No – 303, Bhumika Residency, Plot No-21, Sector-20, Roadpali, Kalamboli, Panvel (Tal.), Raigad (Dist.),

Maharashtra, India – 410218.

Mobile: +91 99309 98399 / +91 99674 97447

E-mail: [admin@ipspl.in](mailto:admin@ipspl.in) / [sales@ipspl.in](mailto:sales@ipspl.in) Website: [www.ipspl.in](http://www.ipspl.in)

CIN : U52399MH2021PTC368555